CORRECTED VERSION

(19) World Intellectual Property Organization International Bureau

NIPO OMPL

(43) International Publication Date 12 January 2006 (12.01.2006)

(10) International Publication Number WO 2006/004376 A1

(51) International Patent Classification:

C08F 12/32 (2006.01) C08F 2/38 (2006.01) C08F 32/00 (2006.01) C08F 4/80 (2006.01)

(21) International Application Number:

PCT/KR2005/002149

(22) International Filing Date:

5 July 2005 (05.07.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 10-2004-0052612

7 July 2004 (07.07.2004) KR

(71) Applicant (for all designated States except US): LG CHEM. LTD. [KR/KR]; 20 Yeouido-dong, Youngde-ungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): YOON, Sung-Cheol [KR/KR]; 106-502 Cheonggu Narae Apt., Jeonmin-dong, Yuseong-gu, Daejeon-city 305-729 (KR). WON, Young-Chul [KR/KR]; 104-601 Wonchun Jugong Apt., Wonchun-dong, Youngtong-gu, Suwon-city, Kyungki-do 443-755 (KR). PARK, Young-Whan [KR/KR]; 102-203 Woosung Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-340 (KR). CHUN, Sung-Ho [KR/KR]; 101-806 Hyundai Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-740 (KR). CHOI, Dai-Seung [KR/KR]; 101-1107 Dairim Durae Apt., Shinsung-dong, Yuseong-gu, Daejeon-city 305-720 (KR). KIM, Won-Kook [KR/KR]; 115-1203 Hwangsil Town 302, Wolpyung3-dong, Seo-gu, Daejeon-city 302-850 (KR). LIM, Tae-Sun [KR/KR]; 7-202 LG Company Housing Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-740 (KR). KIM, Heon [KR/KR]; 5-501 Dowon LG Company Housing Apt. 435

Ansan-dong, Yeosu-city, Jeollanam-do 555-050 (KR). LEE, Jung-Min [KR/KR]; 824-1 Inui-dong, Gumi-city, Kyungsangbuk-do 730-320 (KR). PAIK, Kyung-Lim [KR/KR]; 9-4, 401-2 Jungchon-dong, Jung-gu, Daejeon-city 301-841 (KR).

- (74) Agent: Y.P.LEE, MOCK & PARTNERS; The Cheonghwa Bldg. 1571-18 Seocho-dong, Seocho-gu, Seoul 137-874 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report


(48) Date of publication of this corrected version:

1 June 2006

(15) Information about Correction: see PCT Gazette No. 22/2006 of 1 June 2006

[Continued on next page]

(54) Title: METHOD OF PRODUCING CYCLIC OLEFIN POLYMERS HAVING POLAR FUNCTIONAL GROUPS, OLEFIN POLYMER PRODUCED USING THE METHOD AND OPTICAL ANISOTROPIC FILM COMPRISING THE SAME

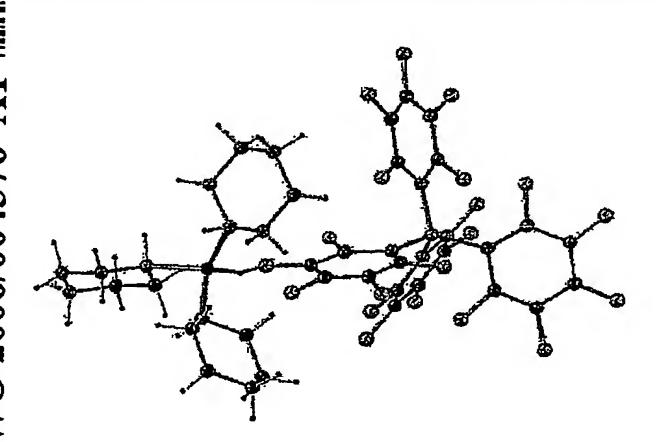

(57) Abstract: A method of producing a cyclic olefin polymer having a polar functional group and a high molecular weight with a high yield in which a catalyst is not deactivated due to polar functional groups, moisture and oxygen is provided. A ccording to the olefin polymerization method, deactivation of a catalyst due to polar functional groups of monomers can be prevented, and thus a polyolefin having a high molecular weight can be prepared with a high yield, and the ratio of catalyst to monomer can be less than 1/5000 due to good activity of the catalyst, and thus removal of catalyst residues is not required.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(19) World Intellectual Property Organization International Bureau

AIPO OMPL

(43) International Publication Date 12 January 2006 (12.01.2006)

PCT

(10) International Publication Number WO 2006/004376 A1

(51) International Patent Classification⁷: 2/38, 32/00, 4/80

C08F 12/32,

(21) International Application Number:

PCT/KR2005/002149

(22) International Filing Date:

5 July 2005 (05.07.2005)

(25) Filing Language:

Ţ

English

(26) Publication Language:

English

(30) Priority Data: 10-2004-0052612

7 July 2004 (07.07.2004) KR

- (71) Applicant: LG CHEM. LTD. [KR/KR]; 20 Yeouido-dong, Youngdeungpo-gu, Seoul 150-721 (KR).
- (72) Inventors: YOON, Sung-Cheol; 106-502 Cheonggu Narae Apt., Jeonmin-dong, Yuseong-gu, Daejeon-city 305-729 (KR). WON, Young-Chul; 104-601 Wonchun Jugong Apt., Wonchun-dong, Youngtong-gu, Suwon-city, Kyungki-do 443-755 (KR). PARK, Young-Whan; 102-203 Woosung Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-340 (KR). CHUN, Sung-Ho; 101-806 Hyundai Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-740 (KR). CHOI, Dai-Seung; 101-1107 Dairim Durae Apt., Shinsung-dong, Yuseong-gu, Daejeon-city 305-720 (KR). KIM, Won-Kook; 115-1203 Hwangsil Town 302, Wolpyung3-dong, Seo-gu, Daejeon-city 302-850 (KR). LIM, Tae-Sun; 7-202 LG Company Housing Apt., Doryong-dong, Yuseong-gu, Daejeon-city 305-740 (KR). KIM, Heon; 5-501 Dowon LG Company Housing Apt. 435 Ansan-dong, Yeosu-city, Jeollanam-do

555-050 (KR). LEE, Jung-Min; 824-1 Inui-dong, Gumi-city, Kyungsangbuk-do 730-320 (KR). PAIK, Kyung-Lim; 9-4, 401-2 Jungchon-dong, Jung-gu, Daejeon-city 301-841 (KR).


- (74) Agent: Y.P.LEE, MOCK & PARTNERS; The Cheonghwa Bldg. 1571-18 Seocho-dong, Seocho-gu, Seoul 137-874 (KR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

--- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PRODUCING CYCLIC OLEFIN POLYMERS HAVING POLAR FUNCTIONAL GROUPS, OLEFIN POLYMER PRODUCED USING THE METHOD AND OPTICAL ANISOTROPIC FILM COMPRISING THE SAME

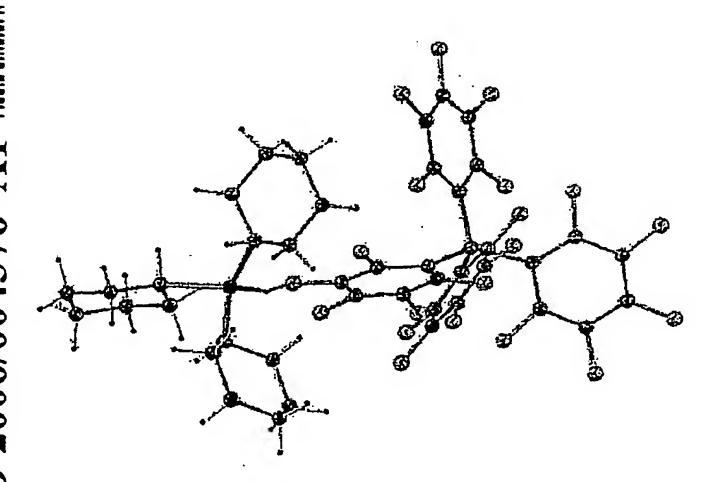

(57) Abstract: A method of producing a cyclic olefin polymer having a polar functional group and a high molecular weight with a high yield in which a catalyst is not deactivated due to polar functional groups, moisture and oxygen is provided. A ccording to the olefin polymerization method, deactivation of a catalyst due to polar functional groups of monomers can be prevented, and thus a polyolefin having a high molecular weight can be prepared with a high yield, and the ratio of catalyst to monomer can be less than 1/5000 due to good activity of the catalyst, and thus removal of catalyst residues is not required.

[3]

[4]

[5]

PCT/KR2005/002149

Description P20 Rec'al Tour 1006 JUL 2006

METHOD OF PRODUCING CYCLIC OLEFIN POLYMERS HAVING POLAR FUNCTIONAL GROUPS, OLEFIN POLYMER PRODUCED USING THE METHOD AND OPTICAL ANISOTROPIC FILM COMPRISING THE SAME

Technical Field

The present invention relates to a method of producing cyclic olefin polymers, and more particularly, to a method of producing cyclic olefin polymers having polar functional groups using a catalyst composed of a Group 10 metal compound and a phosphonium salt compound, olefin polymers produced using the method, and an optical anisotropic film comprising the same.

Background Art

Inorganic materials such as silicon oxides or nitrides have been mainly utilized in the information and electronic industries. R ecent technical developments and demands for compact and high efficiency devices need new high performance materials. In this respect, a great deal of attention has been paid to polymers which have desirable physicochemical properties such as low dielectric constant and moisture absorption rate, high adhesion to metals, strength, thermal stability and transparency, and a high glass transition temperature (T₂ > 250 °C).

Such polymers can be used as insulating layers of semiconductors or TFT-LCDs, protecting films for polarizing plates, multichip modules, integrated circuits (ICs), printed circuit boards, molding materials for electronic components or electronic materials for flat panel displays, etc.

As one of new performance materials, cyclic olefin polymers which are composed of cyclic olefin monomers such as norbornenes exhibit much more improved properties than conventional olefin polymers, in that they show high transparency, heat resistance and chemical resistance, and have a low birefringence and moisture absorption rate. Thus, they can be applied to various applications, e.g., optical components such as CDs, DVDs and POFs (plastic optical fibers), information and electronic components such as capacitor films and low-dielectrics, and medical components such as low-absorbent syringes, blister packagings, etc.

Cyclic olefin polymers are known to be prepared by one of the following three methods: ROMP (ring opening metathesis polymerization), copolymerization with ethylene, and addition polymerization using catalysts containing transition metals such as Ni and Pd. These methods are depicted in Reaction Scheme 1 below. Depending on the central metal, ligand and cocatalyst of a catalyst used in the polymerization

[9]

[10]

reaction, polymerization characteristics and the structure and characteristics of polymers to be obtained may be varied.

[6] Reaction Scheme 1

In ROMP, a metal chloride such as TiCl₄ or WCl₆ or a carbonyl-type organometallic compound reacts with a cocatalyst such as Lewis acid, R₃Al or Et₂AlCl to form active catalyst species such as a metal carbene or a metallocyclobutane which react with double bonds of olefin to provide a ring opened product having double bonds (Ivin, K. J.; O'Donnel, J. H.; Rooney, J. J.; Steward, C. D. Makromol. Chem. 1979, Vol. 180, 1975). A polymer prepared by the ROMP method has one double bond per one monomeric repeating unit, thus, the polymer has poor thermal and oxidative stability and is mainly used as thermosetting resins.

In order to improve physicochemical properties of polymers prepared by the ROMP method, a method of hydrogenation of the ROMP-polymer in the presence of Pd or Raney-Ni catalysts has been proposed. Hydrogenated polymer shows improved oxidative stability, but still needs to be improved in its thermal stability. Further, a cost increased due to additional processes is against its commercial application.

Ethylene-norbornene copolymers are known to be first synthesized using a titanium-based Ziegler-Natta catalyst by Leuna, Corp., (Koinzer, P. et al., DE Patent No. 109,224). However, impurities remaining in the copolymer deteriorates its transparency and its glass transition temperature (T_p) is very low, i.e., 140 °C or lower.

As to the addition polymerization of cyclic olefinic monomers, Gaylord et al. reported a polymerization of norbornene using [Pd(C₆H₅CN)Cl₂]₂ as a catalyst (Gaylord, N.G.; Deshpande, A.B.; Mandal, B.M.; Martan, M. J. Macromol. Sci.-Chem. 1977, A11(5), 1053-1070). Furthermore, Kaminsky et al. reported a homopolymerization of norbornene using a zirconium-based metallocene catalyst (Kaminsky, W.; Bark, A.; Drake, I. Stud. Surf. Catal. 1990, Vol. 56, 425). These polymers havea

high crystallinity, thermally decompose at a high temperature before they melt, and are substantially insoluble in general organic solvents.


- Adhesion of polymers to inorganic surfaces such as silicon, silicon oxide, silicon nitride, alumina, copper, aluminium, gold, silver, platinum, nickel, tantalium, and chromium is often a critical factor in the reliability of the polymer for use as electronic materials. The introduction of functional groups into norbornene monomers enables the control of chemical and physical properties of a resultant norbornene polymer.
- U.S. Patent No. 3,330,815 discloses a method of polymerizing norbornene monomers having a polar functional group. However, the catalyst is deactivated by polar functional groups of norbornene monomers, which results in an earlier termination of the polymerization reaction, thereby producing a norbornene polymer having a molecular weight of 10,000 or less.
- U.S. Patent No. 5,705,503 discloses a method of polymerizing norbornene monomers having a polar functional group using ((Allyl)PdCl) /AgSbF₆ as a catalyst. However, an excess of the catalyst is required (1/100 to 1/400 molar ratio relative to the monomer) and the removal of the catalyst residues after polymerization is difficult, which causes the transparency of the polymer to be deteriorated due to a subsequent thermal oxidation.
- Sen et al. reported a method for polymerizing various ester norbornene monomers in the presence of a catalyst, $[Pd(CH_3CN)_4][BF_4]_2$, in which exo isomers were selectively polymerized, and the polymerization yield was low. (Sen et al., *J. Am. Chem. Soc.* 1981, Vol. 103, 4627-4629). In addition, a large amount of the catalyst is used (the ratio of catalyst to monomer is 1:100 to 1:400) and it is difficult to remove catalyst residues after the polymerization.
- U.S. Patent No. 6,455,650 issued to Lipian et al. discloses a method of polymerizing norbornene monomers having a functional group in the presence of a small amount of a catalyst, $[(R')_z M(L')_x (L')_y]_b [WCA]_d$. However, the product yield in a polymerization of a polar monomer such as an ester-norbornene, is only 5%. Thus, this method is not suitable for the preparation of polymers having polar functional groups.
- Sen et al. reported a method for polymerizing an ester-norbornene in the presence of a catalyst system including [(1,5-Cyclooctadiene)(CH₃)Pd(Cl)], PPh₃, and Na⁺ [3,5-(CF₃)₂C₆H₃]₄B, in which the polymerization yield of ester-norbornenes is 40% or lower, the molecular weight of the polymer is 6,500 or lower, and the molar amount of the catalyst used is about 1/400 based on the monomer (Sen et al., Organometallics 2001, Vol. 20, 2802-2812).
- Therefore, there is still a demand for an addition-polymerization of cyclic olefins having polar functional groups which is able to meet a certain desired level in the aspect of polymerization yield, a molecular weight of a resultant polymer, and a molar

ratio of a catalyst to monomers.

Disclosure of Invention

Technical Solution

- The present invention provides a method for producing a cyclic olefin polymer having polar functional groups and a high molecular weight in a high yield by using a catalyst which is not deactivated due to polar functional groups, moisture and oxygen.
- [19] The present invention also provides a cyclic olefin polymer having polar functional groups, which has a high glass transition temperature and a desirable thermal and oxidative stability, a desirable chemical resistance and adhesion to metal.
- [20] The present invention also provides an optical anisotropic film made from a cyclic olefin polymer having polar functional groups.
- [21] According to an aspect of the present invention, there is provided a method of producing cyclic olefin polymers having polar functional groups, which comprises:
- [22] preparing a catalyst mixture including
- i) a procatalyst represented by formula (1) containing a group 10 metal and a ligand containing hetero atoms bonded to the metal;
- ii) a cocatalyst represented by formula (2) including a salt compound which is capable of providing a phosphonium cation and an anion weakly coordinating to the metal of the procatalyst; and
- [25] addition-polymerizing cyclic olefin monomers having polar functional groups in the presence of an organic solvent and the catalyst mixture, at a temperature of 80-150 °C:

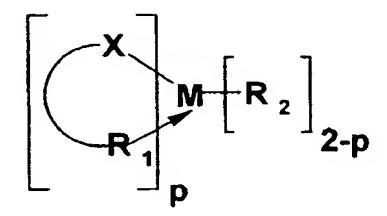

(1)

- [26] where X is a hetero atom selected from S, O and N;
- [27] R_1 is CH=CHR²⁰, -OR²⁰, -SR²⁰, -N(R²⁰), -N=NR²⁰, -P(R²⁰), -C(O)R²⁰, -C(R²⁰)=NR R_1 is CH=CHR²⁰, -OC(O)OR²⁰, -OC(O)R²⁰, -C(R²⁰)=CHC(O)R²⁰, -R²¹C(O)R²⁰, -R²¹C(O)R²⁰
- [28] R₂ is a linear or branched C₁₋₂₀ alkyl, alkenyl or vinyl; a C₅₋₁₂ cycloalkyl optionally substituted by a hydrocarbon; a C₆₋₄₀ aryl optionally substituted by a hydrocarbon; a C aralkyl optionally substituted by a hydrocarbon; or C₃₋₂₀ alkynyl;

- [29] M is a Group 10 metal; and
- [30] p is an integer from 0 to 2, and
- [31] $[(R_3)-P(R_4),(R_4),[Z(R_5)],[Ani] (2)$
- [32] where each of a, b and c is an integer from 0 to 3, and a+b+c=3;
- [33] Z is O, S, Si or N;
- [34] d is 1 when Z is O or S, d is 2 when Z is N, and d is 3 when Z is Si;
- [35] R₂ is a hydrogen, an alkyl, or an aryl;
- [36] each of R_4 , R_4 and R_5 is a hydrogen; a linear or branched C_{1-20} alkyl, alkoxy, allyl, alkenyl or vinyl; a C_{3-12} cycloalkyl optionally substituted by a hydrocarbon; a C_{6-40} aryl optionally substituted by a hydrocarbon; a C_{7-15} aralkyl optionally substituted by a hydrocarbon; a C_{3-20} alkynyl; a tri(linear or branched C_{1-10} alkyl)silyl; a tri(linear or branched C_{1-10} alkoxy)silyl; a tri(optionally substituted C_{3-12} cycloalkyl)silyl; a tri(optionally substituted C_{6-40} aryl)silyl; a tri(linear or branched C_{1-10} alkyl)siloxy; a tri(optionally substituted C_{3-12} cycloalkyl)siloxy; or a tri(optionally substituted C_{3-12} cycloalkyl)siloxy; or a tri(optionally substituted C_{6-40} aryl)siloxy, in which each substituent is a halogen or C_{1-20} haloalkyl; and
- [37] [Ani] is an anion capable of weakly coordinating to the metal M of the procatalyst and is selected from the group consisting of borate, aluminate, [SbF₆]-, [PF₆]-, [AsF₆]-, perfluoroacetate([CF₃CO₂]-), perfluoropropionate([C₂F₅CO₂]-), perfluorobutyrate([CF₃CF₂CF₂CO₂]-), perchlorate([ClO₄]-), p- toluenesulfonate([p-CH₃C₆H₄SO₃]-), [SO₃CF₃]-, boratabenzene, and carborane optionally substituted with a halogen
- [38] According to another aspect of the present invention, there is provided a cyclic olefin polymer having a polar functional group, produced using the above method.
- [39] According to another aspect of the present invention, there is provided an optical anisotropic film including a cyclic olefin polymer having a polar functional group.

Advantageous Effects

According to the olefin polymerization method, deactivation of a catalyst due to a polar functional group of a monomer can be prevented, and thus a polyolefin having a high molecular weight can be prepared with a high yield, and the ratio of catalyst to monomer can be less than 1/5000 due to good activity of the catalyst, and thus removal of catalyst residues is not required.

Description of Drawings

[41] Figure 1 represents a molecular structure of tricyclohexylphosphonium (tetrakispentafluorophenyl)borate.

Mode for Invention

[42] A method of producing cyclic olefin polymers having polar functional groups

according to an embodiment of the present invention includes: preparing a catalyst mixture including (i) a procatalyst represented by formula (1) containing a group 10 metal and a ligand containing hetero atoms bonded to the metal and (ii) a cocatalyst represented by formula (2) including a salt compound which is capable of providing a phosphonium cation and an anion weakly coordinating to the metal of the procatalyst; and addition-polymerizing cyclic olefin monomers having polar functional groups in the presence of an organic solvent and the catalyst mixture, at a temperature of 80-150 °C.

- In the present embodiment, the deactivation of a catalyst due to a polar functional group of the monomer, moisture and oxygen can be prevented, the catalyst is thermally and chemically stable, thereby a high yield and a high molecular weight of the cyclic olefin polymer can be achieved with a small amount of the catalyst and the removal process of the catalyst residue is not required.
- In formula (1), an arrow represents that a hetero atom or C=C bond of a ligand coordinates to a metal, which is called the dative bond.
- In the method, the procatalyst is very stable even in the presence of a monomer having a polar functional group, moisture and oxygen and the phosphonium cocatalyst does not generate an amine which is produced by the ammonium borate to poison the catalyst. Further, in the reaction of the procatalyst with the cocatalyst, a phosphine is formed to stabilize the cationic species, thereby inhibiting the deactivation of the catalyst by a polar functional group of a monomer, moisture and oxygen.

[46]

- As to a polymerization temperature, in the case of general organometallic polymerization catalysts, when the polymerization temperature increases, the polymerization yield increases, whereas a molecular weight of a polymer decreases or catalysts lose the polymerization activity by thermal decomposition (Kaminsky et al. Angew. Chem. Int. Ed., 1985, vol 24, 507; Brookhart et al. Chem. Rev. 2000, vol 100, 1169; Resconi et al. Chem. Rev. 2000, vol 100, 1253).
- Meanwhile, a polar group of a norbornene monomer interacts with the catalyst at room temperature to prevent the double bond of a norbornene from coordinating to an active site of the catalyst, thereby resulting in decrease in the polymerization yield and the molecular weight. However, when the polymerization temperature increases, the double bond of a norbornene is easy to insert into the metal-growing polymer chain bond to increase the activity and a β-hydrogen of a growing polymer chain bonded to the metal cannot form a stereo structural environment to be eliminated where it can interact with the catalyst in view of inherent properties of the norbornene monomer, thereby increasing the molecular weight of the polymer (Kaminsky et al. Macromol. Symp. 1995, vol 97, 225). Thus, it is necessary to increase the polymerization temperature. However, most catalysts conventionally used to produce polynorbornenes

having polar functional groups tend to be decomposed at 80 °C or higher, and thus polymers having high molecular weights cannot be obtained in a high yield. However, the catalyst of the present embodiment is thermally stable not to be decomposed at 80 °C or higher and prevents the interaction between the polar functional group of the norbornene monomer and the cationic catalyst, and thus a catalyst active site can be formed or recovered, thereby producing a high molecular weight cyclic olefin polymer having a polar functional group in a high yield. When the polymerization temperature is higher than 150 °C, catalyst components are decomposed in solution, and thus it is difficult to produce a cyclic olefin polymer having a polar functional group and a high molecular weight in a high yield.

- According to the method of the present embodiment, when a polar functional group in a monomer is an acetyl group, a high yield in polymerization can be obtained with a high molecular weight, which is supported by Examples and Comparative Examples. The catalyst mixture is stable even in the presence of polar functional groups, moisture, oxygen, and other impurities. Thus, while conventional catalysts have good activity only in-situ and in the absence of air, the catalyst mixture of the present embodiment can be stored in a solution for a long period of time, the isolation of solvent is not required, and its activity is maintained even in air. Therefore, the method of the present embodiment can reproducibly be used under various preparation conditions, which is particularly important in industrial mass-production.
- That is, the catalyst mixture including (i) a procatalyst represented by formula (1) containing a group 10 metal and a ligand containing hetero atoms bonded to the metal and (ii) a cocatalyst represented by formula (2) including a salt compound which is capable of providing a phosphonium cation and an weakly coordinating anion is not decomposed at the polymerization temperature of 80-150 °C and is stable in the presence of polar functional groups, moisture and oxygen, and shows high activity.
- In the method, borate or aluminate of formula (2) may be an anion represented by formula (2a) or (2b):
- [51] $[M'(R_6)_{\frac{1}{4}}]$ (2a),
- [52] $[M'(OR_{6})_{4}]$ (2b)
- where M' is B or Al; R_6 is each independently a halogen, a C_{1-20} alkyl or alkenyl optionally substituted by a halogen, a C_{3-12} cycloalkyl optionally substituted by a halogen, a C_{6-40} aryl optionally substituted by a C_{3-20} hydrocarbon, a C_{6-40} aryl substituted by a linear or branched C_{3-20} trialkylsiloxy or a linear or branched C_{18-48} triarylsiloxy, or a C_{7-15} aralkyl optionally substituted by a halogen.
- The cyclic olefin monomer used in the method is a norbornene-based monomer having a polar functional group. A norbornene-based monomer or norbornene derivative means a monomer having at least one norbornene (bicyclo[2.2.2]hept-2-ene)

unit. The norbornene-based monomer is represented by formula (3):

(3)

where m is an integer from 0 to 4; at least one of R_{1} , R_{2} , R_{3} , and R_{3} is a polar [55] functional group and the others are nonpolar functional groups; R_{γ} , R_{γ} , R_{γ} , and R_{γ} " can be bonded together to form a saturated or unsaturated C₄₋₁₂ cyclic group or a C₆₋₂₄ aromatic ring, in which the nonpolar functional group is a hydrogen, a halogen, a linear or branched C₁₋₂₀ alkyl, haloalkyl, alkenyl or haloalkenyl, a linear or branched C₃₋₂₀ alkynyl or haloalkynyl, a C_{3-12} cycloalkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, a C_{6-40} aryl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, or a C_{7-15} aralkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; and the polar functional group is a non-hydrocarbonaceous polar group having at least one O, N, P, S, Si or B and is -R⁸ OR⁹, -OR⁹, -OC(O)OR⁹, -R⁸OC(O)OR⁹, -C(O)R⁹, -R⁸C(O)OR⁹, -C(O)OR⁹, -C(O)OR⁹, -R⁸C(O)R⁹, $-OC(O)R^9$, $-R^8OC(O)R^9$, $-(R^8O)_1 - OR^9$, $-(OR^8)_1 - OR^9$, $-C(O) - O-C(O)R^9$, $-R^8$ $C(O)-O-C(O)R^9$, $-SR^9$, $-R^8SR^9$, $-SSR^8$, $-R^8SSR^9$, $-S(=O)R^9$, $-R^8S(=O)R^9$, $-R^8C(=S)R^9$, - $R^{8}C(=S)SR^{9}$, $-R^{8}SO_{3}R^{9}$, $-SO_{3}R^{9}$, $-R^{8}N=C=S$, -NCO, $R^{8}-NCO$, -CN, $-R^{8}CN$, $-NC(=S)R^{9}$, $-R^{8}NNC(=S)R^{9}$, $-NO_{2}$, $-R^{8}NO_{2}$,

$$-C(0)N_{R13}^{R12} - R^{14}C(0)N_{R13}^{R12} - N_{R13}^{R12} - R^{14}N_{R13}^{R12} - R^{14}N_{R13}^{R12} - R^{14}O_{R}^{R12} - R^{14}O_{R}^{R12}$$

,in which each of R^8 and R^{11} is a linear or branched C_{1-20} alkylene, haloalkylene, alkenylene or haloalkenylene, a linear or branched C_{3-20} alkynylene or haloalkynylene, a C_{3-12} cycloalkylene optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, a C_{6-40} arylene optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, or a C_{7-15} aralkylene optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; each of R^9 , R^{10} , R^{12} and R^{13} is a hydrogen, a halogen, a linear or branched C_{1-20} alkyl, haloalkyl, alkenyl or haloalkenyl, a linear or branched C_{3-20} alkynyl or haloalkynyl, a C_{3-12} cycloalkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, a C_{6-40} aryl optionally substituted by an alkyl, an alkenyl, an alkynyl, a C_{7-15} aralkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, a caralkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl, or an alkoxy, an haloalkoxy, a carbonyloxy or a halocarbonyloxy; and k is an integer from 1 to 10.

In the method of the present embodiment, the procatalyst represented by formula (1) and the cocatalyst represented by formula (2) may be a compound represented by formula (4) and a compound represented by formula (5), respectively;

$$\begin{bmatrix} R'_1 & X' \\ Y' \end{bmatrix}_r M \begin{bmatrix} X' & R'_2 \\ Y' & R'_2 \end{bmatrix}$$

(4)

- where each of X' and Y' is a hetero atom selected from S and O; each of R_1 ', R_2 ', R_2 and R_2 is a linear or branched C_{1-20} alkyl, alkenyl or vinyl, a C_{5-12} cycloalkyl optionally substituted by a hydrocarbon, a C_{6-40} aryl optionally substituted by a hydrocarbon, or a C_{7-15} aralkyl optionally substituted by a hydrocarbon, or a C_{3-20} alkynyl; M is a Group 10 metal; and each of r and s is an integer from 0 to 2 and r+s = 2, and
- [58] $[H-P(R_{\lambda})_{3}][Ani]$ (5)
- where R_4 is a hydrogen, a linear or branched C_{1-20} alkyl, alkoxy, allyl, alkenyl or vinyl, an optionally substituted C_{3-12} cycloalkyl, an optionally substituted C_{6-40} aryl, an optionally substituted C_{7-15} aralkyl, or a C_{3-20} alkynyl, in which each substituent is a halogen or a C_{1-20} haloalkyl; and [Ani] is an anion capable of weakly coordinating to the metal M of the procatalyst represented by formula (1) and is selected from the group consisting of borate, aluminate, $[SbF_6]$ -, $[PF_6]$ -, $[AsF_6]$ -, perfluoroacetate($[CF_3]$ CO_2)-), perfluoropropionate($[C_2F_5]$ CO_2)-), perfluorobutyrate($[CF_3]$ CF_2 CF_2 CO_2)-), perchlorate($[CIO_4]$ -), p- toluenesulfonate($[CP_3]$ CO_3 -), $[SO_3]$ -), $[SO_3]$ -, boratabenzene, and carborane optionally substituted by a halogen .
- In the method of the present embodiment, the procatalyst represented by formula (1) and the cocatalyst represented by formula (2) may be a palladium compound represented by formula (4a) and a phosphonium compound represented by formula (5), respectively;

$$\begin{bmatrix} R_1 & O \\ O \end{bmatrix} Pd \begin{bmatrix} R_2 \\ R_2 \end{bmatrix}$$

(4a)

where each of R_1' , R_2' , R_2'' and R_2''' is a linear or branched C_{1-20} alkyl, alkenyl or vinyl, a C_{5-12} cycloalkyl optionally substituted by a hydrocarbon, a C_{6-40} aryl optionally

WO 2006/004376 PCT/KR2005/002149

substituted by a hydrocarbon, a C_{7-15} aralkyl optionally substituted by a hydrocarbon, or a C_{3-20} alkynyl; and each of r and s is an integer from 0 to 2 and r+s = 2, and $[H-P(R_4)_3][Ani]$ (5)

[63] where R_{λ} and [Ani] are as defined above.

[62]

In the method of the present embodiment, in the procatalyst represented by formula (1), the metal is Pd, p is 2, and the ligand having a hetero atom directly coordinating to Pd is acetylacetonate or acetate, and in the cocatalyst including a salt compound having a phosphonium represented by formula (2), b is 0, c is 0, R₃ is H, and R₄ is cyclohexyl, isopropyl, t-butyl, n-butyl or ethyl.

The phosphonium compound used as the cocatalyst in the method has an electronically stabilizing ability and thermally and chemically activates transition metal compounds. In the method, the molar ratio of the cocatalyst to the procatalyst containing group 10 transition metal is in the range of 0.5:1-10:1. When the molar ratio of the cocatalyst to the procatalyst is less than 0.5:1, the effect of activating the procatalyst is inefficient. When the molar ratio of the cocatalyst to the procatalyst is greater than 10:1, an excess of phosphonium compound coordinates to the metal to prevent a norbornene monomer from coordinating to the metal and the cationic catalyst active species is too electronically stabilized to interact with the double bond of a norbornene monomer, thereby resulting in decreasing both polymerization yield and molecular weight.

The catalyst mixture including the procatalyst and the cocatalyst may be supported on an inorganic support. The inorganic support may be silica, titania, silica/chromia, silica/chromia/titania, silica/alumina, aluminum phosphate gel, silanized silica, silica hydrogel, montmorillonite clay or zeolite. When the catalyst mixture is supported on an inorganic support, a molecular weight distribution of a polymer can be controlled by selecting inorganic support and the polymer morphology can be improved.

The catalyst mixture can be directly used in a solid phase without a solvent or can be mixed in a solvent to form a preformed catalyst in the form of a mixture or a complex of the respective catalyst components, i.e. the group 10 metal compound and the phosphonium compound. Further, each catalyst components can be directly added into the polymerization reaction system without being preformed. When the catalyst mixture is dissolved in a solvent, dichloromethane, dichloroethane, toluene, chlorobenzene or a mixture thereof can be used as the solvent.

The total amount of the organic solvent in the reaction system may be 50-800%, and preferably 50-400%, by weight of based on the total monomer in the monomer solution. When the total amount of the organic solvent in the reaction system is less than 50% based on the weight of the total monomer in the monomer solution, the mixing in the polymerization reaction is difficult due to high viscosity of the polymer

solution. When the total amount of the organic solvent in the reaction system is greater than 800% based on the weight of the total monomer in the monomer solution, both the polymerization yield and the molecular weight are reduced due to slow polymerization rate.

In the polymerization reaction system, the molar ratio of the catalyst mixture based on the Group 10 transition metal compound to the monomers contained in the monomer solution is in the range of 1:2,500 - 1:200,000. This ratio of the catalyst to the monomers is far smaller than that used in conventional polymerization reaction system for preparing a polar cyclic olefin polymer, however it is sufficient to exhibit catalytic activity in the method of the present invention for preparing a high molecular weight of a cyclic olefin polymer. Preferably, the molar ratio of the catalyst system to the monomers is in the range of 1: 5,000~1: 20,000, and more preferably

When the molar ratio of the procatalyst to the monomer is greater than 1:2,500, it is difficult to remove the catalyst residue in polymer. When the molar ratio of the procatalyst to the monomer is less than 1:200,000, the catalytic activity is low.

A norbornene addition polymer having a polar functional group produced using the method of the present embodiment includes at least 0.1-99.9 mol% of a norbornene-based monomer having a polar functional group, in which the norbornene having a polar functional group is composed of a mixture of endo and exo isomers and the deterioration of the catalytic activity by endo-isomers containing polar functional groups can be avoided and thus a composition ratio of the mixture is not critical for polymerization performance. In the method, the monomer solution may further include cyclic olefin having non-polar functional group.

In accordance with the method of the invention, a homopolymer is prepared by polymerizing same norbornene-based monomer containing a polar functional group, or a copolymer including di-, tri- and multi-copolymers is prepared by polymerizing different polar functional norbornene-based monomers, or a copolymer including di-, tri- and multi-copolymers is prepared by polymerizing a polar functional norbornene-based monomer and a norbornene monomer having non-polar functional group.

In accordance with the method of the present invention, the cyclic olefin polymer containing polar functional groups having a molecular weight of 100,000 or more can be prepared in a yield of 40% or higher. In order to fabricate an optical film using the cycloolefin polymer, the molecular weight of the cycloolefin polymer is preferably controlled to 100,000-1,000,000. To control the molecular weight, a linear or branched cyclic C_{1-20} olefin may be further used. Examples of the olefin include 1-hexene, 1-octene, cyclopentene, ethylene, etc. Such an olefin is added to the end of extending polymer chain and a β -hydrogen of the added olefin is easily eliminated, thereby

[70]

1:10,000-1:15,000.

[71]

[72]

[73]

WO 2006/004376 PCT/KR2005/002149

producing a polymer having a desirable molecular weight.

In conventional polymerization system, cyclic olefin polymers containing polar functional groups is prepared in a very low yield and in a low molecular weight, whereas the present method produces a high molecular weight of a cycloolefin polymer containing polar functional groups in a high yield.

A cyclic olefin polymer having a polar group according to the embodiment of the present invention is provided. Preferably, a norbornene-based polymer having a polar functional group produced according to the method of the previous embodiment is an addition-polymer of a cyclic olefinic monomer represented by formula (3) and has a weight average molecular weight (M_) of 10,000-1,000,000.

[76] When the weight average molecular weight is less than 10,000, a brittle film can be produced. When the weight average molecular weight is greater than 1,000,000, it is difficult to dissolve the polymer in an organic solvent, and thus the processibility is poor.

The norbornene-based polymer containing polar functional groups prepared in accordance with the method of the present invention is transparent, has sufficient adhesion to metals or polymers containing different polar functional groups, thermal stability and strength, and exhibits a low dielectric constant sufficient to be used as insulating electronic materials. The cyclic olefin polymer produced by the present invention has a desirable adhesion to substrates of electronic components without requiring a coupling agent, and at the same time, a sufficient adhesion to metal substrates, e.g., Cu, Ag and Au. Further, the cyclic olefin polymer of the present invention exhibits a desirable optical properties so that it can be used as materials for protective films of polarizing plates and electronic components such integrated circuits (ICs), printed circuit boards, multichip modules, and the like.

The polymer of the present embodiment can be used to produce an optical anisotropic film capable of controlling a birefringence, which could not be produced with the conventional method.

[78]

[79]

A conformational unit of a general cyclic olefin has one or two stable rotation conditions, and thus can achieve an extended form such as polyamide having a rigid phenyl ring as a backbone. When a polar functional group is introduced into a norbornene-based polymer with an extended form, the interaction between molecules increases compared to polymers having simple forms, and thus packing of molecules has a directional order, thereby producing optical and electronic anisotropy.

[80] The birefringence can be controlled according to the type and the amount of polar functional group in the cyclic olefin polymer. In particular, the birefringence in a direction through the film thickness is easily controlled, and thus the polymer of the present embodiment can be used to produce an optical compensation film for various

modes of liquid crystal display (LCD).

- [81] The optical anisotropic film of the cyclic olefin polymer having a polar functional group can be prepared by a solution casting or can be prepared with a blend of one or more cyclic olefin polymers.
- In order to prepare a film by solution casting, it is preferable to introduce a cyclic olefin polymer in a solvent in amount of 5-95% by weight, and preferably 10-60% by weight, and stirring the mixture at room temperature. The viscosity of the prepared solution is 100-10,000 cps, and more preferably 300-8000 cps for solution casting. To improve mechanical strength, heat resistance, light resistance, and manipulability of the film, additives such as a plasticizer, a anti-deterioration agent, a UV stabilizer or an antistatic agent can be added.
- [83] The optical anisotropic film thus prepared has a retardation value (Rth) of 70 to 1000 nm, as defined by the following Equation 1:

$$R_{th} = \Delta (n_y - n_z) \times d$$

(1)

- where n_y is a refractive index of an in-plane fast axis measured at 550 nm, n_z is a refractive index toward thickness direction measured at 550 nm, and d is a film thickness.
- [85] The optical anisotropic film meets a refractive index requirement of

$$n_x \approx n_y < n_z$$

, in which n is a refractive index of an in-plane slow axis, n is a refractive index of an in-plane fast axis, and n is a refractive index toward thickness direction, and thus can be used as a negative C-plate type optical compensation film for LCD.

- [86] Hereinafter, the present invention will be described in more detail with reference to the following Examples. However, these Examples are given for the purpose of illustration and are not to be construed as limiting the scope of the invention.
- In the following Preparation Examples and Examples, all operations handling compounds sensitive to air or water were carried out using standard Schlenk technique or dry box technique. Nuclear magnetic resonance spectra were obtained using Bruker 400 and 600 spectrometers. A molecular weight and a molecular weight distribution of a polymer were determined by gel permeation chromatography (GPC) using standard polystyrene samples. Toluene, hexane and Et₂O were distilled and purified in sodium/ benzophenone and CH₂Cl₂ was distilled and purified in CaH₂.
- [88] Preparation of cocatalyst
- [89] Preparation Example 1: Preparation of (Cy)₃PHCl

WO 2006/004376 PCT/KR2005/002149

(Cy)₃P (2.02 g, 7.2 mmol; Cy = cyclohexyl) was dispersed in Et₂O (150 mL) in a 250 mL Schlenk flask. Then, anhydrous HCl (14.4 mL, 1.0 M in ether) was added to the solution at room temperature to give a white solid. After stirring for about 20 minutes, the solid was filtered through a glass filter and washed three times with Et₂O (80 mL). Thereafter, the residual solvent was removed at room temperature in vacuum to obtain (Cy)₃PHCl (86%, 1.95 g).

- [91] ¹ H-NMR (600MHz, CD₂Cl₂): δ 7.02 ~6.23 (d, 1H, J_{H-P}=470 Hz), 2.56 ~ 1.30 (m, 33H); ¹³C-NMR (600MHz, CD₂Cl₂): δ 28.9 (d), 28.5 (d), 26.8 (d), 25.6 (s). ³¹P-NMR (600MHz, CD₂Cl₂): δ 22.98 (d, J_{P-H}=470 Hz).
- [92] Preparation Example 2: Preparation of (n-Bu)₃PHCl
- [93] (n-Bu)₃P (2.0 g, 10.0 mmol, n-Bu=n-butyl) was dispersed in Et₂O (100 mL) in a 250 mL Schlenk flask. Then, anhydrous HCl (20.0 mL, 1.0 M in ether) was added to the solution at room temperature to give a white solid. After stirring for about 20 minutes, the solid was filtered through a glass filter and washed three times with Et₂O (80 mL). Thereafter, the residual solvent was removed at room temperature in vacuum to obtain (n-Bu)₃PHCl (90%, 2.15 g).
- [94] Preparation Example 3: Preparation of $[(Cy)_3PH][B(C_6F_5)_4]$
- [95] [Li][B(C₆F₅)₄] (1.0 g, 1.46 mmol) was suspended in CH₂Cl₂ (20 mL) in a 100 mL Schlenk flask and the CH₂Cl₂ (20 mL) solution of (Cy)₃PHCl (0.56 g, 1.75 mmol) prepared in Example 1 was slowly added. After stirring for 1 hour, the resulting slurry was filtered to yield a dark yellow filtrate and the solvent was removed in vacuum to obtain tricyclohexylphosphonium(tetrakispentafluorophenyl)borate [(Cy)₃PH][B(C₆F₅)₄] (90%, 1.26 g).
- [96] H-NMR (600MHz, CD Cl₂): δ 5.32 ~4.65 (d, 1H, J_{H-P} =440 Hz), 2.43 ~ 1.33 (m, 33H); ¹³C-NMR (600MHz, CD Cl₂): δ 149.7, 148.1, 139.7, 139.2, 138.1, 138.0, 137.8, 136.2, 125.1, 124.9, 29.0, 28.8, 26.7 (d), 25.4 (s). ³¹P-NMR (600MHz, CD Cl₂): 31.14 (d, J_{P-H} =440 Hz). ¹⁹F-NMR (600MHz, CD Cl₂): -130.90, -161.51, -163.37.
- Crystals suitable for an X-ray diffraction study were grown from dichloromethane solution. The result of an X-ray crystal structure determination is presented in Figure 1. Interestingly, the structure shows that the nonbonding interaction between the phosphorous atom of $[(Cy)_3PH]$ part and the fluorine atom of $[B(C_6F_5)_4]$ part exists.
- [98] Preparation Example 4: Preparation of [(Cy)₃PH][(B(C₆F₅)₄)
- [99] $[(Cy)_3PH][(B(C_6F_5)_4]$ was prepared in the same manner as described in Preparation Example 3, except that $[Na][B(C_6F_5)_4]$ or $[MgBr][B(C_6F_5)_4]$ was used instead of [Li] $[B(C_6F_5)_4]$. The synthesis yield was about 90% similarly to Example 3.
- [100] Preparation Example 5: Preparation of $[(n-Bu)_3PH][(B(C_6F_5)_4)]$
- [101] [Li][B($_6F_5$)₄] (1.0 g, 1.46 mmol) was suspended in CH₂Cl₂ (20 mL) in a 100 mL Schlenk flask and the CH₂Cl₂ (20 mL) solution of (n-Bu)₃PHCl (0.42 g, 1.75 mmol)

prepared in Example 2 was slowly added. After stirring for 1 hour, the resulting slurry was filtered to yield a dark yellow filtrate and the solvent was removed in vacuum to obtain tri n-butylphosphonium(tetrakispentafluorophenyl) borate $[(n-Bu)_3PH][B(C_6F)_4]$ (87%, 1.12 g).

- [102] Preparation Example 6: Preparation of $[(t-Bu)_3PH][(B(C_6F_5)_4)]$
- (t-Bu) P (0.35 g, 1.73 mmol, t-Bu=t-butyl) was dispersed in Et O (30 mL) in a 250 mL Schlenk flask. Then, anhydrous HCl (1.9 mL, 1.0 M in ether) was added to the solution at room temperature to afford a white solid. After stirring for about 20 minutes, the solid was filtered through a glass filter and washed three times with Et O (30 mL). Thereafter, the residual solvent was removed at room temperature in vacuum to obtain (t-Bu) PHCl as a white solid.
- (t-Bu) PHCl was dissolved in CH₂Cl₂ (10 mL). In a glove box, [Li][B(C₆F₅)₄] (1.07 g, 1.56 mmol) was placed in a 100 mL schlenk flask and dissolved in CH₂Cl₂ (20 mL). Then, the (t-Bu) PHCl solution was added dropwise to the [Li][B(C₆F₅)₄] solution. After stirring for 1 hour, the resulting slurry was filtered to yield a green filtrate and the solvent was removed in vacuum to obtain tri t-butylphosphonium(tetrakispentafluorophenyl)borate [(t-Bu)₃PH][B(C₆F₅)₄] (67%, 1.05 g).
- [105] ¹ H-NMR (600MHz, CD₂Cl₂): δ 5.34 ~4.63 (d, 1H, J_{H-P}=440 Hz), 1.61 (d, 27H); ¹³ C-NMR (600MHz, CD₂Cl₂): δ 149.5, 147.9, 139.6, 138.0, 137.7, 136.0, 124.4, 38.3, 30.4. ³¹P-NMR (600MHz, CD₂Cl₂): 63.0 (d, J_{P-H}=440 Hz). ¹⁹F-NMR (600MHz, CD₂Cl₂): -133.3, -163.9, -167.8.
- [106] Preparation Example 7: Preparation of $[(Et)_3PH][(B(C_6F_5)_4)]$
- (Et) P (0.8 g, 6.77 mmol; Et = ethyl) was dispersed in Et O (50 mL) in a 250 mL Schlenk flask. Then, anhydrous HCl (7.4 mL, 1.0 M in ether) was added to the solution at room temperature to afford a white solid. After stirring for about 20 minutes, the solid was filtered through a glass filter and the resultant was washed with hexane (30 mL). Thereafter, the residual solvent was removed at room temperature in vacuum to obtain (Et) PHCl as a white solid.
- (Et) PHCl was dissolved in CH Cl₂ (10 mL). In a glove box, [Li][B(C₆F₅)₄] (4.41 g, 6.43 mmol) was placed in a 100 mL Schlenk flask and dissolved in CH Cl₂ (50 mL). Then, the (Et) PHCl solution was added dropwise to the [Li][B(C₆F₅)₄] solution. After stirring for 1 hour, the resulting slurry was filtered to yield a green filtrate and the solvent was removed in vacuum to obtain triethylphosphonium(tetrakispentafluorophenyl)borate [(Et) PH][B(C₆F₅)₄] (54%, 2.91 g).
- [109] ¹ H-NMR (600MHz, CD₂Cl₂): δ6.06 (m, 0.5H), 5.30 (m, 0.5H), 2.28 (m, 6H), 1.40 (m, 9H); ¹³C-NMR (600MHz, CD₂Cl₂): δ149.5, 147.9, 139.7, 138.0, 137.9, 137.7,

WO 2006/004376 PCT/KR2005/002149

136.1, 124.6, 10.6 (d), 6.8 (d). ³¹P-NMR (600MHz, CD₂Cl₂): 26.3 (d). ¹⁹F-NMR (600MHz, CD₂Cl₃): -133.5, -163.7, -167.8.

- [110] Preparation of cyclic olefin addition-polymers
- [111] Example 1: Polymerization of 5-norbornene-2-allylacetate
- 5-norbornene-2-allylacetate (NB-CH₂-O-C(O)-CH₃) (5 mL, 30.9 mmol, NB=norbornene) and toluene (18 mL) were charged into a 250 mL Schlenk flask. Palladium acetate (Pd(OAc)₂)(OAc=acetate, 0.46 mg, 2.06 μ mol) and [(Cy)₃PH][(B(C F₅)₄] (5.0 mg, 5.2 μ mol) were dissolved in CH₂Cl₂ (1 mL) and added to the monomer solution. While the reaction mixture was stirred for 18 hours at 90 °C the reaction mixture became viscous. After the reaction was completed, 100 ml of toluene was added into the viscous solution to dilute it. The solution was poured into an excess of ethanol to precipitate a white polymer, which was filtered through a glass funnel, washed with ethanol, and dried *in vacuo* at 80 °C for 24 hours to yield 5-norbornene-2-allylacetate polymer (4.73 g: 92.2 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 250,071 and Mw/Mn was 2.70.
- [113] Example 2: Polymerization of 5-norbornene-2-allylacetate
- A polymer of 5-norbornene-2-allylacetate was obtained in the same manner as described in Example 1, except that $Pd(OAc)_2$ (0.14 mg, 0.62 μ mol) and [(Cy) PH] [(B(C F)) (1.2 mg, 1.24 μ mol) were used and the polymerization temperature was 100 °C. The resulting polymer was obtained in 4.00 g of yield (78 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 262,149 and Mw/Mn was 2.09.
- [115] Example 3: Copolymerization of 5-norbornene-2-allylacetate and 5-butylnorbornene
- 5-norbornene-2-allylacetate (NB-CH₂-O-C(O)-CH₃) (5 mL, 30.9 mmol),
 5-butylnorbornene (1.3 mL, 7.7 mmol), and toluene (7.3 mL) were charged into a 250 mL Schlenk flask. Pd(OAc)₂ (0.17 mg, 0.77 μ mol) and [(Cy)₃PH][(B(C₆F₅)₄) (1.48 mg, 1.55 μ mol) were dissolved in CH₂Cl₂ (1 mL) and added to the monomer solution. While the reaction mixture was stirred for 18 hours at 90 °C the reaction mixture became viscous. After the reaction was completed, 120 ml of toluene was added into the viscous solution to dilute it. The solution was poured into an excess of ethanol to precipitate a white polymer, which was filtered through a glass funnel, washed with ethanol, and dried *in vacuo* at 80 °C for 24 hours to yield 5-norbornene-2-allylacetate/5-butylnorbornene copolymer (4.35 g: 69.2 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the copolymer was 303,550 and Mw/Mn was 2.16.
- [117] Example 4: Copolymerization of 5-norbornene-2-allylacetate and

5-butylnorbornene

- 5-norbornene-2-allylacetate and 5-butylnorbornene were copolymerized in the same manner as described in Example 3, except that Pd(OAc)₂ (0.09 mg, 0.39 μ mol) and [(Cy)₃PH][(B(C₆F₅)₄) (0.74 mg, 0.77 μ mol) were used. The resulting polymer was obtained in 2.9 g of yield (46 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 362,680 and Mw/Mn was 1.96.
- [119] Example 5: Copolymerization of 5-norbornene-2-allylacetate, 5-butylnorbornene and 5-norbornene-2-carboxylic methylester
- 5-norbornene-2-allylacetate (5 mL, 30.9 mmol), 5-butylnorbornene (1.2 mL, 6.6 mmol), 5-norbornene-2-carboxylic methylester (1 mL, 6.6 mmol) and toluene (12.4 mL) were charged into a 250 mL Schlenk flask. Pd(OAc)₂ (0.66 mg, 2.94 μ mol) and [(Cy)₃PH][(B(C₆F₅)₄) (5.65 mg, 5.88 μ mol) were dissolved in CH₂Cl₂ (1 mL) and added to the monomer solution. While the reaction mixture was stirred for 18 hours at 90 °C the reaction mixture became viscous. After the reaction was completed, 120 ml of toluene was added into the viscous solution to dilute it. The solution was poured into an excess of ethanol to precipitate a white polymer, which was filtered through a glass funnel, washed with ethanol, and dried *in vacuo* at 80 °C for 24 hours to yield 5-norbornene-2-allylacetate/5-butylnorbornene / 5-norbornene-2-carboxylic methylester polymer (6.45 g: 90.5 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 211,891 and Mw/Mn was 2.67.
- [121] Example 6: Copolymerization of 5-norbornene-2-allylacetate, 5-butylnorbornene and 5-norbornene-2-carboxylic methylester
- 5-norbornene-2-allylacetate, 5-butylnorbornene and 5-norbornene-2-carboxylic methylester were copolymerized in the same manner as in Example 5, except that Pd(OAc)₂ (0.20 mg, 0.88 μ mol) and [(Cy)₃ PH][(B(C₆F₅)₄) (1.70 mg, 1.77 μ mol) were used. The resulting polymer was obtained in 3.3 g of yield (46.7 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 261,137 and Mw/Mn was 2.01.
- [123] Examples 7-13: Polymerization of 5-norbornene-2-allylacetate
- Polymers of 5-norbornene-2-allylacetate were prepared in the same manner as described in Example 1, except that the molar ratios of [(Cy) PH][(B(C₆F₅)₄) to Pd(OAc)₂ were changed to 2:1, 1:1, 2:3, 1:2, 1:4 and 1:8. 5-norbornene-2-allylacetate (4 mL, 24.7 mmol) and toluene (12 mL) were used and polymerization temperature and time were 90 °C and 4 hours, respectively. The results are shown in Table 1 below.
- [125] Table 1

	Pd(OAc) ₂	[HP(Cy) ₃	Pd/B	Yield		Mw	Mw/Mn
	(mg)] [B(C ₆ F ₅]) ₄](mg)	(molar ratio)	[g]	[%]		
Example 7	1.1	2.4	2/1	1.77	43.2	333,400	2.11
Example 8	1.1	4.7	1/1	3.52	86.0	272,800	2.28
Example 9	1.1	7.1	2/3	3.82	93.2	260,000	2.56
Example 10	1.1	9.5	1/2	3.83	93.4	256,300	2.49
Example 11	1.1	19.0	1/4	3.80	90.5	221,600	2.45
Example 12	1.1	28.4	1/6	3.39	82.7	194,100	2.25
Example 13	1.1	38.0	1/8	3.30	80.5	193,200	2.20

[126] Example 14-16: Polymerization of 5-norbornene-2-allylacetate

5-norbornene-2-allylacetate was polymerized together with cyclopentene in molar ratios of cyclopentene to 5-norbornene-2-allylacetate of 10:1, 5:1 and 7:3. 5 - norbornene-2-allylacetate (10 mL, 61.7 mmol) and toluene (20 mL) were charged onto a 250 mL Schlenk flask. Pd(OAc)₂ was used in a molar ratio of 1:5000 based on total amount of cyclopentene and the monomer and the molar ratio of [(Cy)₃PH][(B(C₆F₅)₄) to Pd(OAc)₂ was 2:1. The experimental procedure was carried out in the same manner as described in Example 1 and the result was shown in Table 2.

[128] Table 2

	Monomer /Cp (molar ratio)	Cp(mL)	Pd(OAc) ₂ (mg)	Yield	Mw	Mn	Mw/Mn
Example 14	10/1	0.54	3.1	9.7 g (91 %)	136,701	56,387	2.42
Example 15	5/1	1.4	3.5	9.4 g (83.2 %)	76,135	28,945	2.63

Example	7/3	2.3	4.0	9.2 g (76	62,607	25,584	2.45
16			-	%)			

[129] Example 17: Polymerization of 5-norbornene-2-allylacetate

5-norbornene-2-allylacetate (10 mL, 61.7 mmol) and wet toluene (35 mL) were charged into a 250 mL Schlenk flask in air. Pd(OAc)₂ (0.92 mg, 4.11 μ mol) and [(Cy)₃ PH][(B(C₆F₅)₄) (7.9 mg, 8.23 μ mol) were dissolved in CH₂Cl₂ (1 mL) and added to the monomer solution. While the reaction mixture was stirred for 18 hours at 90 °C the reaction mixture became viscous. After the reaction was completed, 120 ml of toluene was added into the viscous solution to dilute it. The solution was poured into an excess of ethanol to precipitate a white polymer, which was filtered through a glass funnel, washed with ethanol, and dried *in vacuo* at 80 °C for 24 hours to yield a 5-norbornene-2-allylacetate polymer (9.74 g: 95 % by weight based on the total weight of used monomers). The weight average molecular weight (Mw) of the polymer was 271,010 and Mw/Mn was 2.40.

[131] Examples 18-20: Polymerization of 5-norbornene-2-allylacetate

[132] 5-norbornene-2-allylacetate was polymerized in the same manner as described in Example 17, except that the relative amounts of a toluene and a catalyst over a monomer were varied. The results were shown in Table 3.

[133] Table 3

	Monomer (mL)	Toluene/ Monomer (volumetr ic ratio)		Yield	Mw	Mn	Mw/Mn
Example 17	10	3.0	15,000	9.74 g (95.0 %)	271,000	113,000	2.40
Example 18	10	2.0	15,000	9.70 g (94.6 %)	319,000	124,000	2.57
Example 19	10	3.0	10,000	10.08 g (98.4 %)	287,000	114,000	2.51
Example 20	10	2.0	10,000	10.04 g (98.0 %)	307,000	120,000	2.57

[134] Examples 21-23: Polymerization of 5-norbornene-2-allylacetate

[135] 5-norbornene-2-allylacetate (3 mL, 18.5 mmol) and toluene (11 mL) were charged onto a 250 mL Schlenk flask and a 1.23 mM of the catalysts solution in CH_2Cl_2 was prepared in a 2:1 ratio of $[(Cy)_3PH][(B(C_6F_5)_4]$ to $Pd(OAc)_2$. The catalyst solution was

WO 2006/004376 PCT/KR2005/002149

used in polymerization after aging for 24, 32, and 48 hours. The subsequent experimental procedure was carried out in the same manner as described in Example 1 and the result was shown in Table 4.

[136] Table 4

	Aging time (hr)	Yield (%)	Mw	Mn	Mw/Mn
Example 21	24	93.2	288,395	126,503	2.28
Example 22	32	86.0	304,280	144,515	2.11
Example 23	48	94.3	284,763	131,954	2.16

The catalyst solution containing $[(Cy)_3PH][(B(C_6F_5)_4)]$ was observed to kept yellow color even after aging for 48 hours. As shown in Table 4, the polymerization yield was 90% or greater and the molecular weight was 250,000-290,000. The catalyst including $[(Cy)_3PH][(B(C_6F_5)_4)]$ maintained good catalytic activity and good stability even after aging time.

[138] Examples 24-25: Polymerization of 5-norbornene-2-allylacetate

5-norbornene-2-allylacetate (5 mL, 30.9 mmol) and toluene (18 mL) were charged into a 250 mL Schlenk flask. $Pd(OAc)_2$ (0.46 mg, 2.06 μ mol) and $[(Cy)_3PH][(B(C_6F)_4)]$ (5.0 mg, 5.2 μ mol) were dissolved in CH_2Cl_2 (1 mL) and added to the monomer solution. The polymerization was carried out at 80 °C and 150 °C for 18 hours. The subsequent processes were carried out in the same manner as in Example 1 to obtain a 5-norbornene-2-allylacetate polymer and the results were shown in Table 5. For reference, the results of Example 1 were also added.

[140] Table 5

	Polymerizati	Yield (%)	Mw	Mn	Mw/Mn
	on				
	temperature (
	°C)				
Example 1	90	92.2	250,071	92,619	2.70
Example 24	80	83.0	312,300	138,200	2.26
Example 25	150	85.0	145,000	62,000	2.34

[141] Comparative Example 1-3: Polymerization of 5-norbornene-2-allylacetate

[142] A catalyst system including $Pd(OAc)_2$, dimethylanilium (tetrakispentafluorophenyl)borate ($[PhNMe_2H][B(C_6F_5)_4]$) and $P(Cy)_3$ was used. The molar ratio of $[PhNMe_2H][B(C_6F_5)_4]$ to $Pd(OAc)_2$ was 2:1 and the molar ratio of $P(Cy)_3$ to $Pd(OAc)_2$ was 1:1. These catalyst components were dissolved in CH_2Cl_2 to prepare a

1.23 mM orange catalyst solution. Polymerization was carried out in the same manner as described in Examples 21-23. The results were shown in Table 6.

[143] Table 6

	Aging time (hr)	Yield (%)	Mw	Mn	Mw/Mn
Comparative Example 1	24	81.7	289,461	135,137	2.14
Comparative Example 2	32	32.7	300,643	145,393	2.07
Comparative Example 3	48	2.60	233,495	116,726	2.00

The catalyst solution including [PhNMe₂H][B(C₆F₅)₄] turned from orange to green in color after 10 minutes. When polymerization was carried out using the green catalyst solution, the polymerization yield was 80% after aging for 24 hours and was reduced to 10% or less after aging for 48 hours. As a result, catalyst solutions of Comparative Examples 1-3 including [PhNMe₂H][B(C₆F₅)₄] are less stable than catalyst solutions of Examples 21-23 including [(Cy)₃PH][(B(C₆F₅)₄).

[145] Comparative Example 4: Polymerization of 5-norbornene-2-allylacetate

[146] [Li][B(C₅, 1] (20.6 mg, 0.0030 mmol) and 5-norbornene-2-allylacetate (5.0 g, 30 mmol) were charged into a 250 mL Schlenk flask. A solution of [(Allyl)PdCl]₂ (0.55 mg, 0.0015 mmol) and P(Cy)₃ (0.84 mg, 0.0030 mmol) in toluene (0.1 mL) was added into the flask. Polymerization was carried out at 90 °C for 18 hours and the resulting solution was added into an excess amount of ethanol to precipitate polymeric materials. However, no polymer was obtained.

Comparative Example 5: Polymerization of 5-norbornene-2-carboxylic methylester [148] 5-norbornene-2-carboxylic methylester (MENB(NB-C(O)-O-CH₃) (5 mL, 34.4 mmol) and toluene (18 mL) were charged into a 250 mL Schlenk flask . A CH₂Cl₂ solution (1 mL) of Pd(OAc)₂ (0.772 mg, 3.44 μ mol) and [HP(Cy)₃][(B(C₆F₅)₄) (6.61 mg, 6.88 μ mol) was added into the monomer solution via a syringe at 90 °C . Polymerization reaction was carried out at 90 °C for 18 hours. Thereafter, the resulting solution was added into an excess amount of ethanol to obtain white polymer precipitates. The precipitates were filtered through a glass filter to recover a polymer. The polymer was dried in a vacuum oven at 80 °C for 24 hours to obtain 5-norbornene-2-carboxylic methylester polymer (0.8 g: 15 % by weight based on the total weight of used monomers).

[149] Comparative Example 6: Polymerization of 5-norbornene-2-carboxylic butylester

- 5-norbornene-2-carboxylic butylester (MENB(NB-C(O)-O-CH₂CH₂CH₂CH₃) (5 mL, 34.4 mmol) and toluene (17 mL) were charged into a 250 mL Schlenk flask . A CH₂Cl₂ solution (1 mL) of Pd(OAc)₂ (0.56 mg, 2.51 μ mol) and [HP(Cy)₃][(B(C₆F₅)₄) (4.82 mg, 5.02 μ mol) was added into the monomer solution via a syringe at 90 °C . Polymerization reaction was carried out at 90 °C for 18 hours. Thereafter, the resulting solution was added into an excess amount of ethanol. However, no polymer was obtained.
- [151] Comparative Example 7: Polymerization of 5-norbornene-2-allylacetate
- 5-norbornene-2-allylacetate (5 mL, 30.9 mmol) and toluene (18 mL) were charged into a 100 mL Schlenk flask . $Pd(OAc)_2$ (0.69 mg, 3.09 μ mol) and $[HP(Cy)_3][(B(C_6F_5)_4)$ (5.94 mg, 6.18 μ mol) were dissolved in CH_2Cl_2 (1 mL) and then AlEt (18.5 l), 18.5 l0 mol) was added there. Immediately the solution turns black in color. The black catalyst solution was added to the monomer solution. Polymerization was carried out at 90 °C for 18 hours. Thereafter, the resulting solution was added to ethanol. However, no polymer was obtained.
- [153] Comparative Example 8: Polymerization of 5-norbornene-2-allylacetate
- 5-norbornene-2-allylacetate (5 mL, 30.9 mmol) and toluene (18 mL) were charged into a 100 mL Schlenk flask . $Pd(OAc)_2$ (0.69 mg, 3.09 μ mol) and [PhNMe_H][B(C_6F_5)_4] (5.94 mg, 6.18 μ mol) as catalysts were dissolved in CH_2Cl_2 (1 mL), and then a colorless (Cy)_3P · AlEt_3 complex solution including Cy_3P (0.87 mg, 3.09 μ mol) and AlEt_3 (3.09 \Box , 3.09 μ mol) was added there. Immediately the solution turns black in color. The black catalyst solution was added to the monomer solution. Polymerization was carried out at 90 °C for 18 hours. Thereafter, the resulting solution was added into excess ethanol to obtain white polymer precipitates. The precipitate was filtered through a glass filter and dried in a vacuum oven at 80 °C for 24 hours to obtain a polymer (0.5 g: 10 % by weight based on the total weight of used monomers).
- [155] Comparative Example 9 and 10: Polymerization of 5-norbornene-2-allylacetate 5-norbornene-2-allylacetate (5 mL, 30.9 mmol) and toluene (18 mL) were charged into a 250 mL Schlenk flask . Pd(OAc) $_2$ (0.46 mg, 2.06 μ mol) and [(Cy) $_3$ PH][(B(C $_6$ F)) $_4$) (5.0 mg, 5.2 μ mol) were dissolved in CH Cl $_2$ (1 mL) and added to the monomer solution. The polymerization was carried out at 50 °C and 170 °C for 18 hours. The subsequent processes were carried out in the same manner described as in Example 1.

[157] Table 7

The results were shown in Table 7.

Polymerizati	Yield (%)	Mw	Mn	Mw/Mn
on				
temperature				

WO 2006/004376 PCT/KR2005/002149

	(°C)				
Comparative Example 9	50	18.0	265,000	120,400	2.20
Comparative Example 10	170	34.0	105,000	42,800	2.45

- As can be seen in Table 7, as polymerization temperatures such as 50 and 170 °C are not within the range defined above, polymerization yields are considerably reduced. The reason for this is as described above.
- [159] Preparation of optical anisotropic film
- [160] Examples 26 and 27
- [161] Each of the p olymers prepared in Examples 1 and 3 was mixed with a solvent to form a coating solution as shown in Table 8. The coating solutions were cast on a glass substrate using a knife coater or a bar coater, and then the s ubstrate was dried at room temperature for 1 hour and further dried under a nitrogen atmosphere at 100 °C for 18 hours. The glass substrate was kept at -10 °C for 10 seconds and the film on the glass plate was peeled off to obtain a clear film having an uniform thickness. The thickness deviation of the film was less than 2%. The thickness and the light transmittance of the obtained film were shown in Table 8

[162] Table 8

	Composition of	film solution	Physical properties of film		
	Polymer (parts by weight)	Solvent (parts by weight)	Thickness ([])	Light transmittance (%)	
Example 26	Polymer prepared in Example 1	THF 560	114	92	
Example 27	Polymer prepared in Example 3	CH ₂ Cl ₂ 360 and TOLUENE 200	120	92	

- [163] In Table 8, THF is tetrahydrofurane.
- [164] Measurement of optical anisotropy
- [165] Experimental Example 1 and 2
- [166] For clear films produced in Examples 26 and 27, a refractive index n was measured using an Abbe refractometer, an in-plane retardation value Re was measured using an automatic birefringence analyzer (available from Oji Scientific Instrument; KOBRA-

21 ADH), and a retardation value R_{θ} was measured when the angle between incident light and the film surface was 50° and a retardation value R_{θ} between the direction through the film thickness and the in-plane x-axis was calculated using Equation (2):

$$R_{th} = \frac{R_{\theta} \times \cos \theta_f}{\sin^2 \theta_f}$$

(2).

A refractive index difference $(n_{x}-n_{y})$ and a refractive index difference $(n_{y}-n_{z})$ were calculated by dividing R_{e} and R_{th} by the film thickness. $(n_{x}-n_{y})$, R_{θ} , R_{th} and $(n_{y}-n_{z})$ of each clear film were indicated in Table 9.

[168] Table 9

	n (refractive index)	$(n_x - n_y) \times 10^3$	$R_{th}(nm/\square)$	$(n_y-n_z)x10^3$
Experimental Example 1	1.52	0.008	2.32	_
Experimental Example 2	1.50	0.009	2.13	2.13

- When films were covered with a triacetate cellulose film having $n_y > n_z$, R_θ values of all cyclic olefin films increased, which indicates that R_{th} of a cyclic olefin film is produced due to a negative birefringence $(n_y > n_z)$ in a direction through the film thickness.
- [170] According to the olefin polymerization method, deactivation of a catalyst due to a polar functional group of a monomer can be prevented, and thus a polyolefin having a high molecular weight can be prepared with a high yield, and the ratio of catalyst to monomer can be less than 1/5000 due to good activity of the catalyst, and thus removal of catalyst residues is not required.
- While the present invention has been particularly shown and described with r eference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

Industrial Applicability

The present inventin provides an addition-polymerization of cyclic olefins having polar functional groups which is able to meet a certain desired level in the aspect of polymerization yield, a molecular weight of a resultant polymer, and a molar ratio of a

WO 2006/004376

PCT/KR2005/002149

catalyst to monomers.

Claims

[1] A method of producing cyclic olefin polymers having polar functional groups, the method comprising:

preparing a catalyst mixture including

- i) a procatalyst represented by formula (1) containing a group 10 metal and a ligand containing hetero atoms bonded to the metal;
- ii) a cocatalyst represented by formula (2) including a salt compound which is capable of providing a phosphonium cation and an anion weakly coordinating to the metal of the procatalyst; and

addition-polymerizing cyclic olefin monomers having polar functional groups in the presence of an organic solvent and the catalyst mixture, at a temperature of 80-150 °C:

$$\begin{bmatrix} X \\ M + R_2 \end{bmatrix}_{2-p}$$

(1)

where X is a hetero atom selected from S, O and N;

R₁ is - CH=CHR²⁰, -OR²⁰, -SR²⁰, -N(R²⁰)₂, -N=NR²⁰, -P(R²⁰)₂, -C(O)R²⁰, -C(R²⁰)=NR²⁰, -C(O)OR²⁰, -OC(O)OR²⁰, -OC(O)R²⁰, -C(R²⁰)=CHC(O)R²⁰, -R²¹C(O)R²⁰, -R²¹C(O)OR²⁰ or -R²¹OC(O)R²⁰, in which R²⁰ is a hydrogen, a halogen, a linear or branched C₁₋₅ alkyl, a linear or branched C₁₋₅ haloalkyl, a linear or branched C₅₋₁₀ cycloalkyl, a linear or branched C₂₋₅ alkenyl, a linear or branched C₁₋₂₀ hydrocarbylene;

 R_2 is a linear or branched C_{1-20} alkyl, alkenyl or vinyl; a C_{5-12} cycloalkyl optionally substituted by a hydrocarbon; a C_{6-40} aryl optionally substituted by a hydrocarbon; or C_{7-15} aralkyl optionally substituted by a hydrocarbon; or C_{3-20} alkynyl;

M is a Group 10 metal; and

p is an integer from 0 to 2, and

 $[(R_{a})-P(R_{a})_{a}(R_{a})_{b}[Z(R_{5})_{d}]_{c}][Ani]$ (2)

where each of a, b and c is an integer from 0 to 3, and a+b+c=3;

Z is O, S, Si or N;

d is 1 when Z is O or S, d is 2 when Z is N, and d is 3 when Z is Si;

R₁ is a hydrogen, an alkyl, or an aryl; each of R_4 , R_4 and R_5 is a hydrogen; a linear or branched C_{1-20} alkyl, alkoxy, allyl, alkenyl or vinyl; a C_{3.12} cycloalkyl optionally substituted by a hydrocarbon ; a C_{6-40} aryl optionally substituted by a hydrocarbon; a C_{7-15} aralkyl optionally substituted by a hydrocarbon; a C_{3-20} alkynyl; a tri(linear or branched C_{1-10} alkyl)silyl; a tri(linear or branched C_{1.10} alkoxy)silyl; a tri(optionally substituted $C_{3.12}$ cycloalkyl)silyl; a tri(optionally substituted $C_{6.40}$ aryl)silyl; a tri(optionally substituted C₆₋₄₀ aryloxy)silyl; a tri(linear or branched C₁₋₁₀ alkyl)siloxy; a tri(optionally substituted C₃₋₁₂ cycloalkyl)siloxy; or a tri(optionally substituted C aryl)siloxy, in which each substituent is a halogen or C₁₋₂₀ haloalkyl; and [Ani] is an anion capable of weakly coordinating to the metal M of the procatalyst represented by formula (1) and is selected from the group consisting of borate, aluminate, [SbF₆]-, [PF₆]-, [AsF₆]-, perfluoroacetate([CF₃CO₂]-), perfluoropropionate([C₂F₅CO₂]-), perfluorobutyrate([CF₃CF₂CF₂CO₂]-), perchlorate([ClO₄]-), p-toluenesulfonate([p-CH₃C₆H₄SO₃]-), [SO₃CF₃]-, boratabenzene, and carborane optionally substituted with a halogen.

The method of claim 1, wherein the borate or aluminate of formula (2) is an [2] anion represented by formula (2a) or (2b):

> $[M'(R_6)_4]$ (2a), $[M'(OR_6)_4]$ (2b) where M' is B or Al;

 R_{χ} is each independently a halogen, a linear or branched C_{1-20} alkyl or alkenyl optionally substituted by a halogen, a C_{3.12} cycloalkyl optionally substituted by a halogen, a C₆₋₄₀ aryl optionally substituted by a hydrocarbon, a C₆₋₄₀ aryl optionally substituted by a linear or branched C₃₋₂₀ trialkylsiloxy or a linear or branched C₁₈₋₄₈ triarylsiloxy, or a C₇₋₁₅ aralkyl optionally substituted by a halogen. The method of claim 1, wherein the cyclic olefin monomer is a compound represented by formula (3):

(3)

where m is an integer from 0 to 4;

at least one of R_7 , R_7 , R_7 , and R_7 is a polar functional group and the others are nonpolar functional groups;

[3]

 R_{7} , R_{7} , R_{7} and R_{7} can be bonded together to form a saturated or unsaturated $C_{4.12}$ cyclic group or a $C_{6.24}$ aromatic ring;

the nonpolar functional group is a hydrogen; a halogen; a linear or branched C₁₋₂₀ alkyl, haloalkyl, alkenyl or haloalkenyl; a linear or branched C₃₋₂₀ alkynyl or haloalkynyl; a C₃₋₁₂ cycloalkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; a C₆₋₄₀ aryl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; or a C₇₋₁₅ aralkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; the polar functional group is a non-hydrocarbonaceous polar group having at least one O, N, P, S, Si or B and is -R⁸OR⁹, -OR⁹, -OC(O)OR⁹, -R⁸OC(O)OR⁹, -C(O)OR⁹, -R⁸C(O)OR⁹, -R⁸C(O)OR⁹, -C(O)OR⁹, -R⁸C(O)OR⁹, -R⁸C(O)OR⁹, -R⁸SSR⁹, -SSR⁸, -R⁸SSR⁹, -C(O)R⁹, -R⁸S(=O)R⁹, -R⁸C(=S)R⁹, -R⁸SOR⁹, -SOR⁹, -SOR⁹, -SOR⁹, -SOR⁹, -R⁸NOC(=S)R⁹, -R⁸NOC(=S)R⁹, -NO₂, -R⁸NOC(=S)R⁹, -R⁸NOC(=S)R⁹, -NO₂, -R⁸NOC(=S)R⁹, -R⁸

$$-c(O)N_{R^{13}}^{R^{12}} - R^{11}c(O)N_{R^{13}}^{R^{12}} - N_{R^{13}}^{R^{12}} - R^{11}N_{R^{13}}^{R^{12}} - O_{SR^{12}}^{R^{12}} - R^{11}O_{SR^{12}}^{R^{12}} - O_{SR^{12}}^{R^{12}} - R^{11}O_{SR^{12}}^{R^{12}} - O_{SR^{12}}^{R^{12}} - R^{11}O_{SR^{12}}^{R^{12}} - O_{SR^{12}}^{R^{12}} - R^{11}O_{SR^{12}}^{R^{12}} - O_{SR^{12}}^{R^{12}} - O_$$

in which each of R^8 and R^{11} is a linear or branched C_{1-20} alkylene, haloalkylene, alkenylene or haloalkenylene; a linear or branched C_{3-20} alkynylene or haloalkynylene; a C_{3-12} cycloalkylene optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; a C_{6-40} arylene optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; or a C_{7-15} aralkylene optionally substituted by an alkyl, an alkenyl, a halogen, a haloalkyl, a

each of R^9 , R^{10} , R^{12} and R^{13} is a hydrogen; a halogen; a linear or branched C_{1-20} alkyl, haloalkyl, alkenyl or haloalkenyl; a linear or branched C_{3-20} alkynyl or haloalkynyl; a C_{3-12} cycloalkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; a C_{6-40} aryl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; a C_{7-15} aralkyl optionally substituted by an alkyl, an alkenyl, an alkynyl, a halogen, a haloalkyl, a haloalkenyl or haloalkynyl; or an alkoxy, an haloalkoxy, a carbonyloxy or a haloalkenyloxy; and k is an integer from 1 to 10.

The method of claim 1, wherein the procatalyst represented by formula (1) and the cocatalyst represented by formula (2) are a palladium compound represented by formula (4) and a phosphonium compound represented by formula (5), respectively;

$$\begin{bmatrix} R'_1 & X' \\ Y' \end{bmatrix}_T M \begin{bmatrix} X' & R'_2 \\ Y' & R'_2 \end{bmatrix}$$

(4)

[4]

where each of X' and Y' is a hetero atom selected from S and O; each of R_1 ', R_2 ', R_2 " and R_2 " is a linear or branched C_{1-20} alkyl, alkenyl or vinyl; a C_{5-12} cycloalkyl optionally substituted by a hydrocarbon; a C_{6-40} aryl optionally substituted by a hydrocarbon; a C_{7-15} aralkyl optionally substituted by a hydrocarbon; or a C_{3-20} alkynyl;

M is a Group 10 metal; and

each of r and s is an integer from 0 to 2 and r+s=2, and

 $[H-P(R_{A})_{3}][Ani]$ (5)

where R_4 is a hydrogen; a linear or branched C_{1-20} alkyl, alkoxy, allyl, alkenyl or vinyl; an optionally substituted C_{3-12} cycloalkyl; an optionally substituted C_{6-40}

aryl; an optionally substituted C_{7-15} aralkyl; or a C_{3-20} alkynyl, in which each substituent is a halogen or a C_{1-20} haloalkyl; and

[Ani] is an anion capable of weakly coordinating to the metal M of the procatalyst represented by formula (1) and is selected from the group consisting of borate, aluminate, [SbF₆]-, [PF₆]-, [AsF₆]-, perfluoroacetate([CF₃CO₂]-), perfluoropropionate([C₂F₅CO₂]-), perfluorobutyrate([CF₃CF₂CF₂CO₂]-), perchlorate([ClO₄]-), p- toluenesulfonate([p-CH₃C₄SO₃]-), [SO₃CF₃]-, boratabenzene, and carborane optionally substituted by a halogen.

The method of claim 1, wherein the procatalyst represented by formula (1) and the cocatalyst represented by formula (2) are a palladium compound represented by formula (4a) and a phosphonium compound represented by formula (5), respectively;

$$\begin{bmatrix} R_1 & O \\ O \end{bmatrix} Pd \begin{bmatrix} R_2 \\ R_2 \end{bmatrix}$$

(4a)

where each of R_1 ', R_2 ', R_2 " and R_2 " is a linear or branched C_{1-20} alkyl, alkenyl or vinyl; a C_{5-12} cycloalkyl optionally substituted by a hydrocarbon; a C_{6-40} aryl optionally substituted by a hydrocarbon; a C_{7-15} aralkyl optionally substituted by a hydrocarbon; or a C_{3-20} alkynyl; and each of r and s is an integer from 0 to 2 and r+s = 2, and

 $[H-P(R_4)_3][Ani]$ (5)

where R_4 and [Ani] are as defined in claim 4.

- The method of claims 1, wherein in the procatalyst represented by formula (1), the metal is Pd, p is 2, and the ligand having a hetero atom directly coordinating to the metal is acetylacetonate or acetate, and in the cocatalyst including a salt compound having phosphonium represented by formula (2), b is 0, c is 0, R₃ is H, and R₄ is cyclohexyl, isopropyl, t-butyl, n-butyl or ethyl.
- [7] The method of claim 1, wherein a molar ratio of the cocatalyst to the procatalyst is 0.5-10:1.
- [8] The method of claim 1, wherein the catalyst mixture is supported on a inorganic support.
- [9] The method of claim 8. wherein the inorganic support is at least one selected from the group consisting of silica, titania, silica/chromia, silica/chromia/titania, silica/alumina, aluminum phosphate gel, silanized silica, silica hydrogel, mont-

WO 2006/004376 PCT/KR2005/002149

morillonite clay and zeolite.

- The method of claim 1, wherein an organic solvent used to dissolve the catalyst mixture is at least one solvent selected from the group consisting of dichloromethane, dichloroethane, toluene, chlorobenzene and a mixture thereof.
- [11] The method of claim 1, wherein a total amount of the organic solvent is 50-800% based on the weight of the total monomer in the monomer solution.
- [12] The method of claim 1, wherein the catalyst mixture comprises a metal catalyst complex composed of the procatalyst and the cocatalyst.
- [13] The method of claim 1, wherein the catalyst mixture is added in a solid phase to the monomer solution.
- [14] The method of claim 1, wherein the amount of the catalyst mixture is such that a molar ratio of the procatalyst to the total monomer is 1:2,500 to 1:200,000.
- [15] The method of claim 1, wherein the monomer solution further comprises a cyclic olefin compound having no polar functional group.
- The method of claim 1, wherein the cyclic olefin polymers having polar functional groups comprise a cyclic olefin homopolymer, a copolymer of cyclic olefin monomers having different polar functional groups, or a copolymer of a cyclic olefin monomer having a polar functional group and a cyclic olefin monomer having no polar functional group.
- [17] The method of claim 1, wherein a weight average molecular weight M_w of the cyclic olefin polymer having a polar functional group is 10,000-1,000,000.
- [18] The method of claim 1, wherein the monomer solution further comprises a linear or branched $C_{1,20}$ olefin.
- [19] A polymer produced using the method of any one of claims 1-18, which is an addition polymer of a cyclic olefin monomer having a polar functional group represented by formula (3) and has a weight average molecular weight M_w of 10,000-1,000,000:

(3)

where m, R_7 , R_7 , R_7 and R_7 are as defined in claim 3.

- [20] An optical anisotropic film comprising the cyclic olefin polymer having a polar functional group of claim 19.
- [21] The optical anisotropic film of claim 20, which has a retardation value R

represented by Equation (1) of 70-1000 nm:

$$R_{th} = \Delta (n_y - n_z) \times d$$

(1)

where n is a refractive index of an in-plane fast axis measured at 550 nm; n is a refractive index in a direction through the film thickness measured at 550 nm, and

d is a film thickness.

[22] The optical anisotropic film of claim 21, which is a negative C-plate type optical compensation film for liquid crystal display, satisfying


a refractive index requirement of

$$n_x \cong n_y < n_z$$

, in which n_x is a refractive index of an in-plane slow axis, n_y is a refractive index of an in-plane fast axis, and n_z is a refractive index in a direction through the film thickness.

1/1

FIG. 1

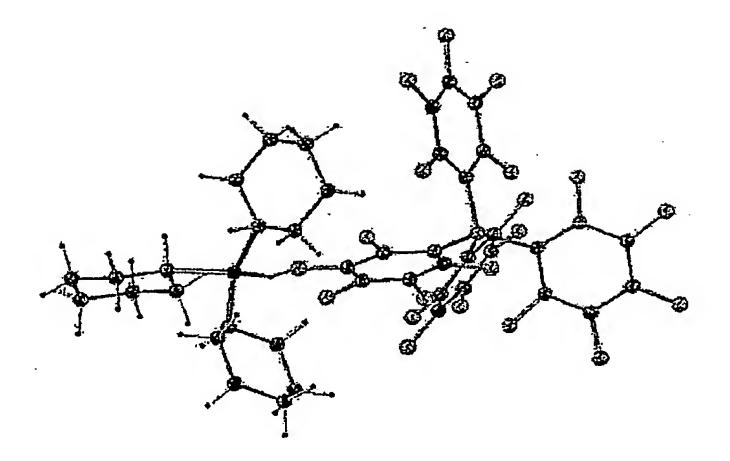

INTERNATIONAL SEARCH REPORT

International application No. PCT/KR2005/002149

Α.	CLASSIFICATION	OF	SUBJECT	MATTER
A.	CLASSIFICATION	VI.	DODUBUL	TATUM TOTAL

IPC7 C08F 12/32, C08F 2/38, C08F 32/00, C08F 4/80

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 C08F 12/32, C08F 2/38, C08F 32/00, C08F 4/80

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Japanese Utility models and application for Utility models since 1975

Electronic data base consulted during the intertnational search (name of data base and, where practicable, search terms used) KIPASS, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
P, X	KR 2005-39777 A (LG Chem.) 29 April 2005 see the whole document	1-22		
P, X	KR 2005-53096 A (LG Chem.) 08 June 2005 see the whole document	1-22		
Y	KR 2004-45108 A (LG Chem.) 01 June 2004 see the whole document	3, 19-22		
Y	KR 2004-49946 A (LG Chem.) 14 June 2004 see the whole document	1, 2, 4-18		
A	KR 2003-80158 A (LG Chem.) 11 October 2003 see the whole document	1-22		
Α	JP 2003-40929 A (JSR Corp.) 13 February 2003 see the whole document	1-22		
A	JP 2002-212209 A (JSR Corp.) 31 July 2002 see the whole document	1-22		

	Further	document	s are	listed	in the	contin	uation	of I	3ox	C.

See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

17 OCTOBER 2005 (17.10.2005)

Date of mailing of the international search report

18 OCTOBER 2005 (18.10.2005)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office 920 Dunsan-dong, Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

BAHN, Yong Byung

Telephone No. 82-42-481-5539

